




A Marley Company
 LAYNE & BOWLER, INC
 MEMPHIS, TENN 38108

SECTIONAL DRAWING
19G, 32SK, 36B, 38H, HOH, 42RK, 44G
SHORT COUPLED BOWLS
OPEN LINE SHAFT
FLANGED DISCHARGE
WITH TOP INTERMEDIATE CONNECTION

SECTION: 9100
DWG. NO.: 8511-B05C
DATE: DEC. 5, 1986
SUPERSEDES:

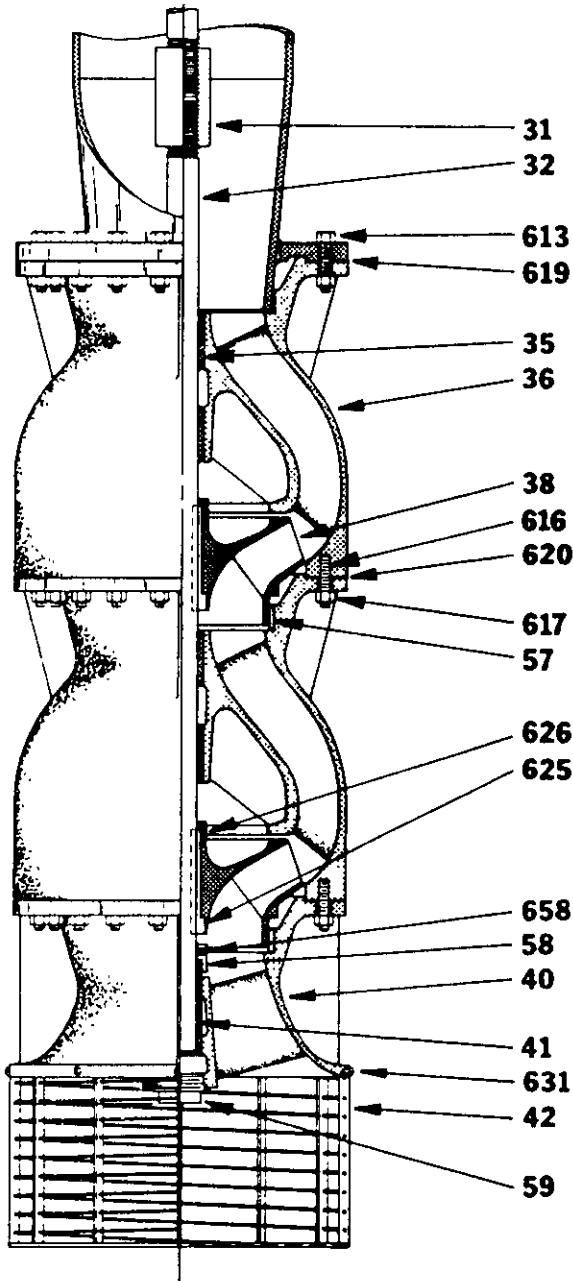

▽	660	BOWL ASSY	-----	
	31	IMP SHAFT COUPLING	STEEL	
	32	IMPELLER SHAFT	410SS	
	35	BEARING, INT. (2/INT)	BRONZE	
	36	INTERMEDIATE	C.I. CL30	
	38	IMPELLER	BRONZE	
	40	SUCTION BELL	C.I. CL30	
	41	BEARING, SUCTION	BRONZE	
◆	42	STRAINER	STEEL	
	57	WEAR RING	BRONZE	
■	58	SAND COLLAR	BRONZE ●	
■	59	SUCTION PLUG	C.I	
	613	MACH. BOLT, BOWL/COL	STEEL	
	616	STUD, BOWL	STEEL	
	617	HEX NUT BOWL	STEEL	
△	619	GASKET, COL/BOWL	-----	
△	620	GASKET, BOWL	-----	
	625	GIB KEY, IMPELLER	STN. STL.	
	626	SET SCREW, IMPELLER	STN. STL.	
	631	MACH. SCREW, STRAINER	STN. STL.	
	658	SET SCREW, COLLAR	STN. STL.	

- ▽ 32SK BOWL AVAILABLE AS SINGLE STAGE ONLY.
- ◆ OPTIONAL - FURNISHED ONLY WHEN SPECIFIED.
- △ OPTIONAL - FURNISHED WHEN SPECIFIED OR WHEN REQUIRED BY BOWL PRESSURE LIMITATIONS.
- NOT FURNISHED WHEN AN OPTIONAL SYNTHETIC SUCTION BEARING MATERIAL IS SPECIFIED.
- MATERIAL - RUBBER ON 19G - NO SET SCREW (ITEM 658) REQUIRED.